

2026

Product Catalog



5G AI Bullet
up to 12 MP



HaLow Outdoor AP
0.1 / 1 / 2 W



Solar Power Kit
60 W · 12 V output

AirLink surveillance cameras

Wi-Fi HaLow 802.11ah long-range wireless

4G / 5G cameras & CPE

Off-grid solar power

AirLink Cloud Platform

- Hardware, network firmware and cloud platform designed and integrated in Taichung, Taiwan
- WireGuard VPN on 4G cameras and 5G ODU; ONVIF / RTSP on every camera
- Hardened profile with P2P cloud services disabled for government, telecom and enterprise
- White-label and source-code licensing of the AirLink Cloud Platform

Wireless surveillance, engineered in Taiwan since 2006

AirLink iLife designs AI cameras, Wi-Fi HaLow and 4G / 5G connectivity, off-grid solar power and the cloud platform that ties them together – for sites where cabling is impractical and data sovereignty matters.

Designed & integrated in Taiwan

Hardware, network firmware and cloud platform engineered by AirLink iLife in Taichung. Our engineers answer your technical questions directly.

AirLink Cloud Platform

Hosted in Taiwan, with white-label and source-code licensing so partners can self-host and build their own brand. 60-day free trial included.

Secure by design

WireGuard VPN on 4G cameras and the 5G ODU, standard ONVIF / RTSP on every camera. A hardened profile with all P2P cloud services disabled is available for government, telecom and enterprise projects.

Complete system, one partner

Cameras, Wi-Fi HaLow long-range wireless, 4G / 5G CPE, off-grid solar power and NVR from a single source. Low-volume customisation on an NRE basis.

Twenty years of wireless

2006	AirLink WiFi Networking Corp. founded, specialising in RF radios and antennas for 2.4 / 5 GHz wide-area Wi-Fi.
2010	Wireless internet cameras for home security with a plug-and-play cloud system.
2013	Green-energy systems combining solar power with AC/DC equipment and IP / CCTV cameras.
2014	802.11ac access points at 1350 / 733 Mbps and MIMO mesh 11abgn outdoor APs.
2016	Solar-powered camera deployments in Japan and the UK.
2017-2021	4G IP cameras, LTE devices and smart-home IoT for seamless connectivity.
2022-2024	5G IDU / ODU devices, 5G / 4G IP cameras and renewable solar solutions.
2025-2026	Wi-Fi HaLow(802.11ah) cameras and access points, WireGuard-secured 4G / 5G, and the AirLink Cloud Platform with white-label and source-code licensing.

Contents

1	Wi-Fi HaLow(802.11ah) cameras	3	6	Network video recorders	9
2	Wi-Fi HaLow access points & antennas	4	7	Off-grid solar power systems	9
3	4G LTE cameras	5	8	AirLink Cloud Platform & customisation	10
4	5G cameras	7	9	Solutions by site	11
5	5G / 4G networking equipment	8		Ordering information & contact	12



Wi-Fi HaLow
Cameras, APs, antennas · p. 3



4G LTE
AI bullet, PTZ, dome · p. 5



5G
PTZ, bullet, LPR · p. 7



Networking
5G / 4G CPE, bridges · p. 8



Recording
H.265 NVR 8-64 ch · p. 9



Solar power
60 W off-grid kits · p. 9

01

Wi-Fi HaLow (802.11ah) cameras


Sub-1 GHz long-range wireless cameras for sites where cabling and cellular are impractical — farms, ports, construction sites and campuses. Every family is available in 0.1 W, 1 W and 2 W radio versions.

0.1 W Standard radio **1 W** High power **2 W** High power, maximum range One outdoor AP serves multiple cameras, several km line-of-sight

Product	Radio version · model	Resolution	Packing / ctn
Bullet cameras			
	HaLow AI Bullet	0.1 W AS-204-5.0MP-AH	5.0 MP · 2592×1944 12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	Sony IMX335 STARVIS · 2.8–12 mm ×4 zoom	1 W AS-204-HP5.0MP-AH-1W	
	Two-way audio · AI human recognition & auto tracking	2 W AS-204-HP5.0MP-AH-2W	
	HaLow Compact Bullet	0.1 W AS-53-5.0MP-AH	5.0 MP · 2592×1944 12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	Sony IMX335 STARVIS · 2.8 mm fixed Two-way audio · AI human recognition & auto tracking		
	HaLow Lighting Bullet	0.1 W AS-205-5.0MP-AH	5.0 MP · 2592×1944 12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	Sony IMX335 STARVIS · 4 / 6 mm	1 W AS-205-HP5.0MP-AH-1W	
	10× white LED full-colour night view · Two-way audio · AI human recognition & auto tracking	2 W AS-205-HP5.0MP-AH-2W	
	HaLow 4K Bullet	0.1 W AS-36-5.0MP-AH	8.0 MP · 3840×2160 18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
	Sony STARVIS 4K · 2.8–12 mm ×4 zoom Two-way audio · AI human recognition & auto tracking		
	HaLow 4K Bullet, smoke & fire	1 W AS-36-5.0MP-AH-1W	8.0 MP · 3840×2160 12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	Sony STARVIS 4K · 2.8–12 mm	2 W AS-36-5.0MP-AH-2W	
	Smoke & fire detection · RS485 · Two-way audio		
PTZ cameras			
	HaLow 4.5" PTZ	0.1 W AS-32R-5.0MP-AH	5.0 MP · 2592×1944 8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
	Sony IMX335 STARVIS · 4.7–94 mm · ×20 optical + ×300 digital Pan 360° / tilt 93° · IR 150 m		
	HaLow 6" PTZ	1 W AS-30R-HP5.0MP-AH-1W	5.0 MP · 2592×1944 8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
	Sony IMX335 STARVIS · 4.7–141 mm · ×30 optical + ×300 digital	2 W AS-30R-HP5.0MP-AH-2W	
	Pan 360° / tilt 90°		
LPR capture cameras			
	HaLow LPR Capture	0.1 W AS-206-5.0MP-AH	5.0 MP · 2592×1944 8 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	Sony STARVIS · 6–22 mm	1 W AS-206-HP-5.0MP-AH-1W	
	Parking-lot LPR ≤ 60 km/h · AI human recognition · RTMP	2 W AS-206-HP-5.0MP-AH-2W	
Smoke & fire detection			
	HaLow Smoke & Fire Detection	0.1 W AS-35R-4.0MP-AH	4.0 MP · 2560×1440 12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
	4 MP sensor · 2.8–12 mm auto focus	1 W AS-35R-HP-4.0MP-AH-1W	
	Built-in red/blue warning light + audio alarm · RS485 · Auto-trigger on smoke/fire event	2 W AS-35R-HP-4.0MP-AH-2W	

Wi-Fi HaLow access points & antennas

Outdoor 902–928 MHz access points supplied complete with PoE injector, adaptor, mounting holder and cable. Pair with omni or Yagi antennas to match coverage and range.

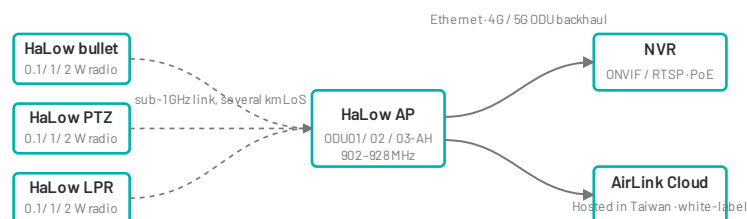

How a HaLow site fits together

Cameras link over sub-1 GHz to an outdoor HaLow access point, which backhauls by Ethernet, or by the AirLink 5G ODU with WireGuard VPN where there is no cable. Match radio power to distance and terrain, and pair the AP with an omni antenna for wide coverage or a Yagi for a long point-to-point path.

	Model	Description	Frequency	Package contents
Access points				
	ODU01-AH	Wi-Fi HaLow outdoor access point, 0.1 W	902–928 MHz	AP ×1 · Adaptor ×1 · PoE injector ×1 · AP holder ×1 · RJ45 1 m ×1
	ODU02-AH	Wi-Fi HaLow high-power outdoor access point, 1 W	902–928 MHz	AP ×1 · Adaptor ×1 · PoE injector ×1 · AP holder ×1 · RJ45 1 m ×1
	ODU03-AH	Wi-Fi HaLow high-power outdoor access point, 2 W	902–928 MHz	AP ×1 · Adaptor ×1 · PoE injector ×1 · AP holder ×1 · RJ45 1 m ×1
Antennas				
	Omni-2	Outdoor omni antenna, 2 dBi	900 MHz	—
	Omni-7	Outdoor omni antenna, 7 dBi	900 MHz	—
	Yagi-20	Directional Yagi antenna, 20 dBi	900 MHz	—

Choosing an antenna. Omni-2 for compact sites where cameras surround the AP; Omni-7 for wider coverage from a central mast; Yagi-20 for a single long-range direction such as a remote gate, pump station or field edge. Radio versions should match: a 2 W camera is paired with the 2 W ODU03-AH.

Regulatory note. Frequency plans differ by region. Specify the destination country when ordering so the correct HaLow band, 4G / 5G bands and certification variant are supplied.

4G LTE cameras

Cellular cameras with built-in 4G module and AirLink-maintained network firmware. Band variants are available for Europe, Latin America, Asia-Pacific and North America — specify your region when ordering.

ASP10 AI bullet series

WireGuard VPN

IP68

4G AI bullet with WireGuard VPN built in — connects directly into your private network without any third-party P2P server. Choose sensor and lens.



5.0 MP · Sony IMX335 STARVIS	Fixed lens	2.8-12 mm	6-22 mm	5-50 mm	AI human & vehicle detection · IP68
	ASP10-5MP-Fixed	ASP10-5MP-2.8-12mm	ASP10-5MP-6-22mm	ASP10-5MP-50mm	
8.0 MP · Sony IMX415 STARVIS	Fixed lens	2.8-12 mm	6-22 mm	5-50 mm	AI human recognition & auto tracking
	ASP10-8MP-Fixed	ASP10-8MP-2.8-12mm	ASP10-8MP-6-22mm	ASP10-8MP-50mm	

Model	Description	Resolution	Packing / ctn
PTZ cameras			
 ASP-215-5.0MP	4G 3" PTZ, metal + plastic · Sony IMX335 STARVIS · 2.7-13.5 mm ×5 zoom	5.0 MP	—
 ASP-215-8.0MP	4G 3" PTZ, all metal · Sony IMX415 STARVIS · 2.7-13.5 mm ×5 zoom	8.0 MP	—
 ASP-200-5.0MP	4G 3.5" PTZ, all metal · Sony IMX335 STARVIS · 2.7-13.5 mm ×5 · Pan 360° / tilt 93° · Two-way audio	5.0 MP	—
 ASP-200-8.0MP	4G 3.5" PTZ, all metal · Sony IMX415 STARVIS · 2.7-13.5 mm ×5 · Pan 360° / tilt 93° · Two-way audio	8.0 MP	—
 ASP-202R-5.0MP	4G 4.5" PTZ · Sony IMX335 STARVIS · 4.7-94 mm ×20 + ×10 digital · Pan 360° / tilt 93°	5.0 MP	8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
 ASP-32R-5.0MP	4G 4.5" PTZ · Sony IMX335 STARVIS · 4.7-94 mm ×20 + ×300 digital · Pan 360° / tilt 93° · IR 150 m	5.0 MP	8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
 ASP-32R-8.0MP	4G 4.5" PTZ · Sony IMX415 STARVIS · 4.7-94 mm ×20 + ×300 digital · Pan 360° / tilt 93° · IR 150 m	8.0 MP	8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
 ASP30R-5.0MP	4G 6" PTZ · Sony IMX335 STARVIS · 4.7-141 mm ×30 + ×10 digital · Pan 360° / tilt 90°	5.0 MP	4 pcs / ctn · 520×520×440 mm · G.W. 16 kg
 ASP30R-8.0MP	4G 6" PTZ · Sony IMX415 STARVIS 1/2.3" · 4.7-141 mm ×30 + ×300 digital · Pan 360° / tilt 90°	8.0 MP	4 pcs / ctn · 520×520×440 mm · G.W. 16 kg

4G LTE cameras (continued)

Model	Description	Resolution	Packing / ctn
Bullet cameras			
 ASP205-4G-5.0MP	4G lighting bullet · Sony IMX335 STARVIS · 2.8-12 mm ×4 · 10× white LED · Two-way audio · AI human recognition & auto tracking	5.0 MP	—
 ASP205-4G-8.0MP	4G lighting bullet · Sony IMX415 STARVIS · 4 / 6 mm · 10× white LED · Two-way audio · AI human recognition & auto tracking	8.0 MP	—
 ASP-204-5.0MP	4G bullet · Sony IMX335 STARVIS · 2.8-12 mm ×4 · Two-way audio · AI human recognition & auto tracking	5.0 MP	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP-204-8.0MP	4G bullet · Sony IMX415 STARVIS · 2.8-12 mm · Two-way audio · AI human recognition & auto tracking	8.0 MP	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP208-5.0MP	4G bullet · Sony IMX335 STARVIS · 2.8-12 mm ×4 · Two-way audio · AI human recognition & auto tracking	5.0 MP	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP-37-5.0MP WireGuard VPN	4G AI bullet · Sony IMX335 STARVIS · WireGuard VPN · 2.8-12 mm ×4 · Two-way audio · AI human recognition & auto tracking	5.0 MP	—
 ASP-37-8.0MP WireGuard VPN	4G AI bullet · Sony IMX415 STARVIS · WireGuard VPN · 2.8-12 mm · Two-way audio · AI human recognition & auto tracking	8.0 MP	—
 ASP-36-4G-5.0MP	4G bullet · 6 mm lens · Facial detection	5.0 MP	—
 ASP-35R-4.0MP	4G bullet · 2.8-12 mm · RS485 · Fire & smoke detection	4.0 MP	—
Dome cameras			
 ASP-212-5.0MP	Vandal-proof metal dome, waterproof · Sony IMX335 STARVIS · 2.8-12 mm · IR 40 m · with junction box	5.0 MP	18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
 ASP-212(4MM)-5.0MP	Vandal-proof metal dome, waterproof · Sony IMX335 STARVIS · 4 mm · IR 15 m · with junction box	5.0 MP	18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
 ASP-213-5.0MP	Vandal-proof metal dome, waterproof · Sony IMX335 STARVIS · 2.8-12 mm · IR 40 m · bracket optional	5.0 MP	18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
 ASP-213-8.0MP	Vandal-proof metal dome, waterproof · Sony IMX415 STARVIS · 2.8-12 mm · IR 40 m · bracket optional	8.0 MP	18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
 ASP-213(4MM)-5.0MP	Vandal-proof metal dome, waterproof · Sony IMX335 STARVIS · 4 mm · IR 15 m	5.0 MP	18 pcs / ctn · 500×340×460 mm · G.W. 14 kg
 ASP-214(4MM)-5.0MP	Dome · Sony IMX335 STARVIS · 4 mm · IR 20 m	5.0 MP	20 pcs / ctn · 500×340×460 mm · G.W. 11 kg

5G cameras

5G NR cameras for high-bitrate 8 MP and 12 MP streaming where 4G is not enough. Pair with the AirLink 5G ODU (WireGuard VPN built in) for secure site-wide backhaul.

Model	Description	Resolution	Packing / ctn
5G PTZ cameras			
 ASP-32R-5G-8.0MP	5G/4G 4.5" PTZ · Sony IMX415 STARVIS 1/2.8" · 4.7–94 mm ×20 + ×300 digital · Pan 360° / tilt 93° · IR 150 m	8.0 MP · 3840×2160	8 pcs / ctn · 525×480×360 mm · G.W. 21 kg
 ASP30R-5.0MP	5G 6" PTZ · Sony IMX335 STARVIS 1/2.8" · 4.7–141 mm ×30 + ×300 digital · Pan 360° / tilt 90°	5.0 MP · 2592×1944	4 pcs / ctn · 520×520×440 mm · G.W. 16 kg
 ASP30R-8.0MP	5G 6" PTZ · Sony IMX415 STARVIS 1/2.3" · 4.7–141 mm ×30 + ×300 digital · Pan 360° / tilt 90°	8.0 MP · 3840×2160	4 pcs / ctn · 520×520×440 mm · G.W. 16 kg
 ASP30R-12.0MP	5G 6" PTZ · Sony IMX577 1/2.3" · 4.7–141 mm ×30 + ×300 digital · Pan 360° / tilt 90°	12.0 MP · 4000×3000	4 pcs / ctn · 520×520×440 mm · G.W. 16 kg
5G bullet & LPR cameras			
 ASP204-5G-5.0MP	5G/4G bullet · Sony IMX335 STARVIS · 2.8–12 mm ×4 · AI human recognition & auto tracking	5.0 MP · 2592×1944	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP304-5G-8.0MP	5G/4G bullet · Sony IMX415 STARVIS · 2.8–12 mm ×4 · AI human recognition & auto tracking	8.0 MP · 3840×2160	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP204-5G-12.0MP	5G/4G bullet · Sony IMX577 1/2.3" · 2.8–12 mm ×4 · AI human recognition & auto tracking	12.0 MP · 4000×3000	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP205-5G-8.0MP	5G/4G lighting bullet · Sony IMX415 STARVIS · 2.8–12 mm ×4 · AI human recognition & auto tracking	8.0 MP · 3840×2160	12 pcs / ctn · 460×390×420 mm · G.W. 16 kg
 ASP300-8.0MP	5G LPR camera · 5–50 mm auto zoom · 4× red LED	8.0 MP · 3840×2160	—
 ASP-35R-4.0MP	5G bullet · 2.8–12 mm · RS485 · Two-way audio	4.0 MP · 2560×1440	—

ASP20-5G-L

180° dual-lens

RTMP

IP66

5G AI dual-lens camera: two 2.8 mm 4 MP sensors stitched into one 8 MP 4096×1944 panorama, so one unit covers the width of two bullets.



Connectivity

5G Sub-6 NSA / SA · NR ENDC 4.1Gbps DL · Wi-Fi 2.4 GHz · RJ45 · Nano-SIM · N. America and standard band variants

Night vision

2× IR 30 m + 2× white LED 20 m colour · up to 50 m · 0.05 lux @ F1.6 · 128 dB WDR

AI & streaming

Humanoid, intrusion, perimeter, sound & light alarm · RTMP push to Wowza / Nginx · ONVIF Profile S · AirLink Cloud metadata + snapshots

Hardware

Two-way audio (G.711, 8 Ω 2 W) · microSD up to 512 GB · DC 12 V, 9.5 W · -20 to +65 °C · 230×130×130 mm, 1.0 kg · Solar ready

5G / 4G networking equipment

Indoor and outdoor 5G CPE, 5G mesh access points, 4G LTE CPE and point-to-point Wi-Fi bridges for camera backhaul and site connectivity. 5G ODU models include WireGuard VPN. CBRS (n48 / B48) variants available.

Model	Description	Type	Remark
5G CPE & outdoor units			
 5G CPE i2	5G indoor CPE · Wi-Fi 6 (2.4 GHz 600 M + 5 GHz 2400 M) · up to 2.77 Gbps DL / 1.25 Gbps UL · LTE 1.2 Gbps · 2× GbE · VoLTE	IDU	CBRS n48 / B48 option
 5G ODU-04 (X62)	5G outdoor CPE, no Wi-Fi · 5G NSA 3.4 Gbps DL / 600 M UL · 5G SA 2.4 Gbps DL / 1 Gbps UL · 2.5 GbE · WireGuard VPN	ODU	CBRS n48 / B48 option
 5G ODU-06-MTKT750	5G outdoor CPE + Wi-Fi AX3000 · 5G NSA up to 3.74 Gbps DL / 738 Mbps UL · 5G SA up to 4.67 Gbps DL / 1.25 Gbps UL · 2.5 GbE ×1 · WireGuard VPN	ODU	CBRS n48 / B48 option
 5G-OM3000	5G mesh outdoor AP · Wi-Fi 6 · 5G SA 2.1G / 900 M · 5G NSA 2.5 G / 650 M · IP66 · 48 V PoE · Dual SIM	ODU	Dual SIM · CBRS option
4G LTE CPE			
 AIR-Ultrasky4G-Cat6	4G Cat 6 · LTE-FDD 300 M DL · 2× GbE · PoE 24 V · Wi-Fi 5, 60 users	4G CPE	Wi-Fi 5
 AIR-Ultrasky4G-Cat12	4G Cat 12 · LTE-FDD 600 M DL / 150 M UL · 2× GbE · PoE 24 V · Wi-Fi 5	4G CPE	Wi-Fi 5
 AIR-Ultrasky4G-0A EU	4G outdoor CPE · 32 users · NAT / DHCP / VPN / firewall	4G CPE	EU band · 2.4 GHz
Point-to-point Wi-Fi bridges			
 MT300	2.4 GHz 300 Mbps bridge, sold as pair · P2P up to 1 km	2.4 GHz	Sold as pair
 MT1200	802.11ac bridge, sold as pair · 2.4 GHz 300 M + 5 GHz 867 M · P2P up to 5 km	2.4 + 5.8 GHz	Sold as pair

06

Network video recorders

H.265 NVRs from 8 to 64 channels, with and without built-in PoE. Compatible with all AirLink cameras via ONVIF / RTSP.

Model	Description	Video input	HDD slots
PoE NVR · H.265			
 NVR-8CH	8-channel PoE NVR	8 × 12 MP	1× SATA, max 8 TB
 NVR-16CH	16-channel PoE NVR	16 × 12 MP	2× SATA, max 14 TB
Standard NVR · H.265			
 NVR-12CH	12-channel NVR	8 ch × 4K or 12 ch × 5 MP	1× SATA, max 8 TB
 NVR-16CH	16-channel NVR	8 ch × 4K / 16 ch × 5 MP / 20 ch × 4 MP	1× SATA, max 8 TB
 NVR-36CH	36-channel NVR	36 ch × 4K or 25 ch × 12 MP	2× SATA, max 14 TB
 NVR-64CH	64-channel NVR · 2× RJ45, 2× HDMI, 2× USB	64 ch × 8 MP or 36 ch × 12 MP	8× SATA, max 14 TB

07

Off-grid solar power systems

Pre-assembled 60 W solar panel and lithium battery kits with regulated 12 V output for cameras and HaLow / 4G / 5G radios. Options: 48 V–12 V PoE splitter, 12 V power adapter. Volume pricing available.

Model	Description	Capacity	Packing / ctn
 SD-6-27	60 W solar panel · 11.1 V / 27 Ah lithium battery · 12 V regulated output	299.7 Wh	1 pc / ctn · 47×22×45 cm · G.W. 9.5 kg
 SD-6-30	60 W solar panel · 11.1 V / 30 Ah lithium battery · 12 V regulated output	333 Wh	1 pc / ctn · 47×22×45 cm · G.W. 9.5 kg
 SD-6-38	60 W solar panel · 11.1 V / 38 Ah lithium battery · 12 V regulated output	421.8 Wh	1 pc / ctn · 47×22×45 cm · G.W. 9.5 kg



Off-grid camera stations

A 60 W panel with a 27–38 Ah lithium pack runs a HaLow or 4G bullet and its radio through the night, with the 12 V regulated output feeding the camera directly or a 48 V PoE splitter for the access point. Sizing depends on latitude, camera type and duty cycle – send us the site and we will recommend the kit.

AirLink Cloud Platform

The platform behind every AirLink camera, offered three ways.

Hosted in Taiwan

Cameras bind to the AirLink Cloud out of the box. Live view, playback, AI event alerts and multi-site management from web and mobile. 60-day free trial on every order.

White-label

Your logo, login interface and app name on the hosted platform, so your customers see your brand while AirLink runs the infrastructure.

Self-hosted & source code

Deploy the platform on your own servers or cloud, with source-code licensing for partners who need full control, local data residency or deep integration.

Hardened profile. For government, telecom and enterprise projects, cameras ship with all P2P cloud services disabled. Access is by ONVIF / RTSP inside your network or through the WireGuard tunnel on 4G cameras and the 5G ODU.

Customisation on an NRE basis

Branding

Logo on housing and packaging, custom login interface, app white-label.

Hardware

Lens, sensor and radio options across existing platforms; low-volume runs supported.

Firmware

Feature adjustments, dedicated MAC range, regional band configuration.

Cloud

White-label hosted platform, self-hosted deployment or source-code licence.

Solutions by site

Typical configurations drawn from customer deployments. Every project is quoted individually — send us a site plan and we will propose the kit.



Farms & agriculture

Long fields, no cabling, no reliable cellular.

- HaLow AI bullet AS-204 family, 1W / 2 W
- HaLow 6" PTZ AS-30R-HP for perimeter sweeps
- ODU02 / ODU03-AH with Yagi-20 to remote corners
- SD-6-30 solar kit per camera station



Construction sites

Temporary, relocatable, self-powered.

- 4G AI bullet ASP10 series with WireGuard VPN
- 4G 4.5" PTZ ASP-32R for site overview
- SD-6-38 solar kit for overnight operation
- AirLink Cloud, white-labelled for the contractor



Ports, yards & logistics

Wide areas, high bitrate, private network.

- 5G 6" PTZ ASP30R-12.0MP at 12 MP
- 5G ODU-04 / 06 backhaul with WireGuard VPN
- 5G-OM3000 mesh AP for yard-wide coverage
- NVR-36CH / NVR-64CH central recording



Parking & access control

Plate capture at the barrier.

- HaLow LPR AS-206 family, ≤ 60 km/h
- 5G LPR ASP300-8.0MP with 5-50 mm auto zoom
- ASP-213 vandal-proof domes at lanes
- PoE NVR-8CH / 16CH at the gatehouse

Hardened deployments. Government, telecom and enterprise projects can order any camera with P2P cloud services disabled, accessed only through ONVIF / RTSP on the private network or the WireGuard tunnel on 4G cameras and the 5G ODU.



Ordering information

Pricing

Quoted per project on request. Volume tiers available.

Lead time

2-4 weeks depending on quantity and model; confirmed at order.

Regions

Specify the destination country for the correct 4G / 5G bands, HaLow frequency plan and certification variant.

Payment

Deposit to initiate the order; balance prior to shipping.

Warranty

Standard 1-year warranty on all products, with technical support from our engineers.

Cloud

AirLink Cloud Platform hosted in Taiwan – 60-day free trial. Self-hosted and source-code licensing available.

AirLink iLife Inc.

No. 13, Aly. 2, Ln. 50-6, Sec. 2, Changping Rd.
Beitun Dist., Taichung City 406, Taiwan
Tel +886-4-2422-1524

Get in touch

www.airlink-ilife.com

info@airlink-ilife.com

WhatsApp +886-911-719-673